

**MODEL 5668D**

# 56K\* MESSAGE MODEM

ANALOG

The USRobotics 56K\* Message Modem features enhanced Fax Machine functionality – it can receive and store faxes without an associated computer being powered on. It also combines convenient telephone messaging features with advanced V.92 technology to optimize performance from your dial-up connection. The integrated answering machine can store up to 20 minutes of phone messages.

Powerful modem features include Quick Connect to reduce your connection time, getting you online quicker, Internet Call Notification which allows you to screen incoming voice calls while online so you won't miss the important ones, and Modem on Hold to answer calls without losing your internet connection – no second phone line is needed! V.PCM Upstream gives you upload speeds up to 50% faster – perfect for sending e-mail messages with attachments.

## USRobotics®

Integrates powerful faxing & voice messaging capabilities



### *Enhanced Integrated Fax Capability*

- Receive and Store faxes on the modem – no computer needs to be turned on
- Retrieve Faxes remotely while away from the office

### *Independent Voice Messaging*

- Store up to 20 minutes of messages or approximately 50 fax pages
- Voice messages can be remotely retrieved through a dial-up connection

### *Get the speed you need*

- Need to send digital pictures or a large presentation? V.92 lets you send attachments up to 50% faster!
- Quick Connect lets you establish your connection quicker – spend less time dialing up. You're only seconds from surfing the Web!

### *Powerful Management Tools*

- USRobotics Internet Call Notification (ICN) lets you screen incoming calls so you can take the important ones. (Call Waiting and Caller ID require service from your local phone company.)
- Modem on Hold lets you take calls while online without dropping your Internet connection – there's no need for a second phone line

### *Software upgradable*

- Download new features and enhancements as they become available

### *Fax and communications software included*


- Send and receive faxes from any Windows application – supports delayed and broadcast faxing and includes customizable interface

### *Exclusive USRobotics Control Center*

- Customize your upload and download speeds – choose to surf the Web at top speed or to send e-mail attachments faster



Easily send and receive faxes



Fax

Remotely access your wire messages from anywhere



Phone




INTERNET



Model 5668D  
Message Modem



PC Serial Port

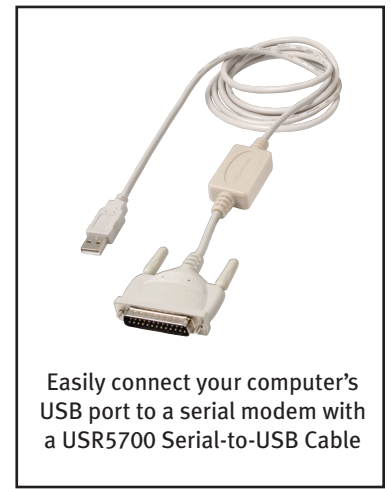

Easily connect your computer's USB port to a serial modem with a USR5700 Serial-to-USB Cable

## MODEL 5668D 56K\* MESSAGE MODEM



### SPECIFICATIONS & STANDARDS

- ITU V.92/V.90 up to 56 Kbps downloads
- Data: V.92, V.90, V.34, V.32bis, V.32, V.22bis, V.22, V.23, and V.21
- ITU V.34 at 33.6 Kbps or 28.8 Kbps
- V.32 at 19.2 Kbps (21.6 Kbps between Courier modems with ASL)
- ITU V.32bis at 14.4 Kbps
- HST at 16.8 Kbps
- Compatible with most ITU and Bell standards down to 300 bps
- Data Error Control; Compression: V.42/V.42bis and MNP2-4/5
- Fax: ITU V.17 at 14.4 Kbps, ITU V.29 at 9600 bps, ITU V.27ter at 7200 bps, Group III, TIA/EIA 578 Class 1, and TIA/EIA 592 Class 2.0
- Caller ID and distinctive ring (require service from your local phone company/Caller ID may not be supported in some countries)

### ENVIRONMENTAL

- **Temperature:** Operating Temperature conditions: 0 to 50 degrees C, Non-Operating Temperature conditions: -20 to 70 degrees C
- **Humidity:** Operating Humidity conditions: 20% to 80% non-condensing, Non-Operating Humidity conditions: 5% to 95% non-condensing

### REGULATORY

- FCC approved (Part 15/Part 68)
- IC approved (ICES-003/CS-03)
- UL/CUL listed
- CE approved (Class B)

### PACKAGE DIMENSIONS/WEIGHT

- 11.25 x 4.5 x 7.0 in. (28.58 x 11.43 x 17.78 cm)
- 3.4 lb (1.54 kg)

### PRODUCT DIMENSIONS/WEIGHT

- 4.3 x 7.1 x 1.7 in. (10.9 x 18 x 4.3 cm)
- 0.61 lb (0.27 kg)

### MINIMUM SYSTEM REQUIREMENTS

#### Hardware

- Supports all major operating systems: DOS, Windows 3.1/95/98/Me/NT 4.0/2000/XP/Server 2003/XP 64 bit/Server 2003 64 bit/Vista/Vista 64 bit\*\*/Win 7/Win 7 64bit\*\* (Unimodem TSP/TAPI compliant), UNIX, Linux, and any operating system that supports an RS-232 serial port
- Available RS-232 serial port
- 56K compatible local analog phone line

#### Software (ICN/Instant Update)

- IBM compatible PC Pentium processor or equivalent
- Internet Call Notification (ICN) supports Windows 95/98/Me/2000/XP/Vista
- Telco/PIT
  - V.90 requires a V.90 56K ITU standard capable service provider
  - V.92 requires a V.92 56K ITU standard capable service provider
  - V.92 Call Notification feature requires Call Waiting service from your local phone company
  - V.92 Call Identification feature requires Call Waiting/Caller ID services from your local phone company

### PACKAGE CONTENTS

- USRobotics 56K Message Modem
- Power supply unit
- Phone cord
- Phone line splitter – included in U.K., Germany, Italy, and France
- Serial cable
- Quick Installation Guide
- Installation CD-ROM, including user guide and data/fax/voice communications software

### WARRANTY

- 2-year limited manufacturer warranty from date of purchase

\* Capable of receiving at up to 56 Kbps and sending at up to 48 Kbps (or 31.2 Kbps with V.90 server). Due to FCC regulations on power output, receiving speeds are limited to 53.3 Kbps. Actual speeds may vary. V.92 and V.90 features require compatible phone service and support from your Internet Service Provider (ISP). USRobotics modems featuring V.92 enhancements are backward compatible and will negotiate the highest possible speed when connecting to an ISP.

† Requires Windows operating system.

\*\* Support for 64 bit operating systems requires a driver update (available in the support section of this website)

For connection to the Public Switched Telephone Network (PSTN)

# USRobotics®

