

# MODEL 8400 4-PORT USB 3.0 HUB

## USB PERIPHERALS

The USRobotics USB 3.0 Hub easily adds up to 4 USB 3.0 ports to your computer. Connect super speed peripherals like USB 3.0 external hard drives, digital video cameras, high-resolution webcams and save time with faster transfer rates of up to 5 Gbps. The blazing fast 5 Gbps transfer rate is up to 10 times faster than USB 2.0 (480 Mbps). The hub is backward compatible so while it is capable of super speed transfers, it also supports USB 2.0 and USB 1.1 speeds. Simultaneous transfers automatically detect USB type and transfer data at the maximum rate for each individual port.

# USRobotics®

Blazing Fast data transfer with USB 3.0



### *USB 3.0 - the new standard*

- Connect any USB 3.0 device to your computer
- Compatible with USB 3.0 specification
- Backwards compatible with USB 2.0/1.1 devices

### *Get the speed you need*

- Super Speed transfer rates up to 5 Gbps
- Up to 10 times faster than USB 2.0
- Each port detects native USB speed and transfers data at the maximum rate for each port

### *Powered USB Ports*

- Each port provides up to 900 mA of power when plugged into outlet
- Ideal for power hungry USB devices


### *Easy Install*

- Plug & Play
- Hot Swappable

### *Applications*

- Add USB 3.0 connections to a desktop that may only have USB 2.0 or 1.1
- Expand USB connections by adding additional USB ports
- Connect additional peripherals such as external hard drives, printers, scanners, digital cameras, video cameras, video surveillance cameras, video display solutions, media devices, etc.



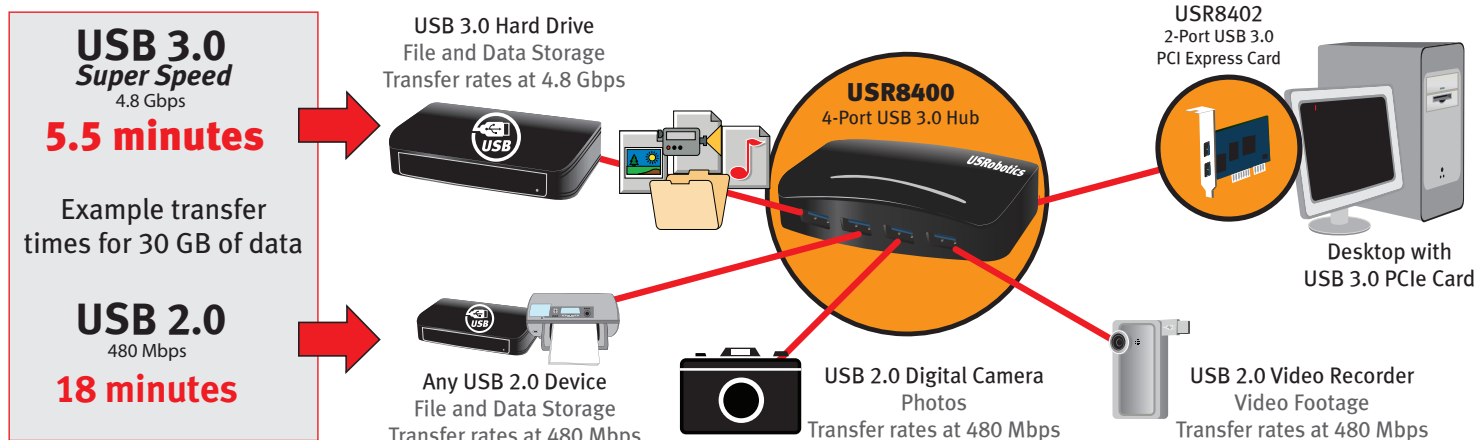

## MODEL 8400 4-PORT USB 3.0 HUB



### SPECIFICATIONS & STANDARDS

#### GENERAL

- Compliant with Universal Serial Bus 3.0 Specification Revision 1.0

#### PHYSICAL

- 1 USB 3.0 Type B Female port (upstream)
- 4 USB 3.0 Type A Female ports (downstream)
- Power Supply: 5V 4A
- Voltage: 100-240V/ 50Hz-60Hz
- Output Current: 5V 4A

#### ENVIRONMENTAL

- Temperature:** Operating Temperature conditions: 0 to 40 degrees C, Non-Operating Temperature conditions: -10 to 85 degrees C
- Humidity:** Operating Humidity conditions: 20% to 80% non-condensing, Non-Operating Humidity conditions: 5% to 95% non-condensing

#### REGULATORY

- FCC approved (Part 15 Class B)
- CE approved (Class B)

#### PACKAGE DIMENSIONS/WEIGHT

- 8.5 x 6.25 x 4.188 in.
- .95 lb

#### PRODUCT DIMENSIONS/WEIGHT

- 3.98 x 2.46 x .93 in.
- .18 lb

#### MINIMUM SYSTEM REQUIREMENTS

- System with available USB port

#### OPERATING SYSTEMS

- Hub is operating system independent and is compatible with all current Windows®, Macintosh, and Linux operating systems

#### PACKAGE CONTENTS

- USRobotics 4-Port USB 3.0 Hub
- DC Power Supply Unit
- USB 3.0 cable (3 ft)
- User Manual

#### PRODUCT NUMBERS

- USR8400
- USR808400

#### WARRANTY

- One-year limited manufacturer warranty from date of purchase

*Note: USB 3.0 super speeds are achieved when used with USB 3.0 compatible devices and cables.*

### USB 3.0 FAMILY OF PRODUCTS

