


# USR5610C 56K\* PERFORMANCE PRO MODEM

ANALOG

The USRobotics 56K\* Performance Pro Modem is controller-based for superior performance — with powerful communication processing functions built right into the modem itself. Quick Connect reduces your connection time to get you online quicker, and V.PCM Upstream provides 50% greater upload speeds — perfect for sending data. Internet Call Notification lets you screen incoming voice calls while online, so you won't miss the important ones, and Modem on Hold allows you to answer calls without losing your Internet connection — no second phone line is needed!†

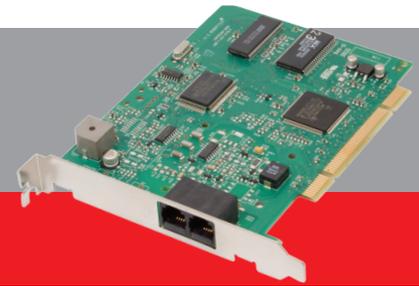

## Powerful, flexible V.92 performance

### *Get the speed you need*

- Quick Connect reduces the time it takes to establish your dial-up Internet connection.
- Need to send digital pictures or a large presentation? V.92 lets you send attachments up to 50% faster!
- Controller-based for superior performance; powerful processing is built into the modem for faster throughput.

### *Powerful Management Tools*

- USRobotics Internet Call Notification (ICN) lets you screen incoming calls so you can take the important ones†. (Call Waiting and Caller ID require service from your local phone company.)
- Modem on Hold lets you take calls while online without dropping your Internet connection — there's no need for a second phone line.

### *Software Upgradable*

- Firmware upgradability and downloadable software ensure that this modem will continue to meet your changing needs.


### *Advanced Line Probing Technology*

- This modem finds the most efficient path for each connection, assuring the best possible speeds, resulting in faster downloads and fewer dropped calls.

### *Designed for Windows and Linux*

- Windows and Linux compatibility means support for a wide range of business applications and games



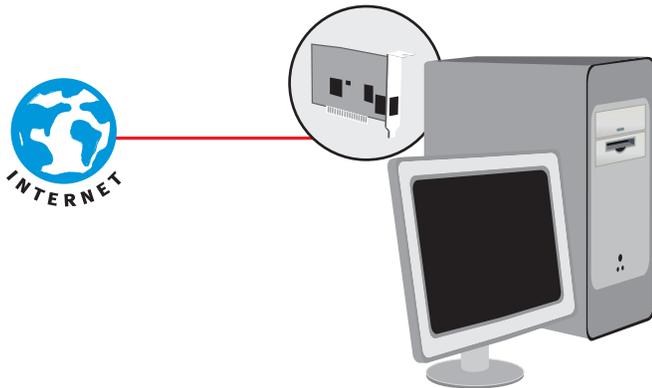

PC with USR5610C 56K\* Performance Pro Modem

# USR5610C 56K\* PERFORMANCE PRO MODEM



## SPECIFICATIONS & STANDARDS

- V.92, V.90, V.34, V.32bis, V.32, V.22bis, V.22, V.23, and V.21
- V.42/MNP 2-4 error correction, V.42 bis/MNP 5 compression
- V.80 video conferencing support
- Fax: EIA 578 (Class 1) and EIA 592 (Class 2.0) with V.17, V.29, V.27ter ITU recommendations
- Caller ID and distinctive ring (require service from your local phone company/Caller ID may not be supported in some countries)
- Hayes Compatible

## POWER CONSUMPTION

- Power 5V
- Signal 5V

## ENVIRONMENTAL

- **Temperature:**
  - Operating Temperature conditions: 0 to 50 degrees C
  - Non-Operating Temperature conditions: -20 to 70 degrees C
- **Humidity:** Operating Humidity conditions:
  - 20% to 80% non-condensing
  - Non-Operating Humidity conditions: 5% to 95% non-condensing

## REGULATORY

- FCC approved (Part 15/Part 68)
- IC approved (ICES-003/CS-03)
- UL/CUL listed

## PACKAGE DIMENSIONS/WEIGHT

- 7.63 x 5.67 x 2.64 in. (19.4 x 14.4 x 6.7 cm)
- 1.2 lb (0.54 kg)

## MINIMUM SYSTEM REQUIREMENTS

### Hardware

- PC with 486DX or Pentium class processor or equivalent
- Available PCI slot
- Analog phone line
- Linux (Kernel 2.3 and higher), Microsoft Windows 95, 98, Me, NT4.0, 2000, XP, Server 2003, XP 64 bit, Server 2003 64 bit, Vista, Vista 64 bit, Win 7/8/10, Win 7/8/10 64 bit, Server 2011, Server 2012/R2, Server 2016, Server 2019 operating system\*\* (Unimodem TSP/TAPI compliant)
- 32 MB RAM recommended (64 MB under Windows 2000; 128 MB under Windows XP)
- CD-ROM Drive

### Software (ICN/Instant Update)

- IBM compatible PC with 486DX or Pentium processor or equivalent
- Internet Call Notification (ICN) supports Windows 95/98/Me/2000/XP
- V.90 requires a V.90 56K ITU standard capable service provider
- V.92 requires a V.92 56K ITU standard capable service provider
- V.92 Call Notification feature requires Call Waiting service from your local phone company
- V.92 Call Identification feature requires Call Waiting/Caller ID services from your local phone company

## PACKAGE CONTENTS

- USRobotics 56K\* PCI internal faxmodem
- RJ-11 phone cord (7 ft)
- Quick Install Guide
- Installation CD

## WARRANTY

- 2-year limited manufacturer warranty from date of purchase

\* Capable of receiving at up to 56 Kbps and sending at up to 48 Kbps (or 31.2 Kbps with V.90 server). Due to FCC regulations on power output, receiving speeds are limited to 53.3 Kbps. Actual speeds may vary. V.92 and V.90 features require compatible phone service and support from your Internet Service Provider (ISP). USRobotics modems featuring V.92 enhancements are backward compatible and will negotiate the highest possible speed when connecting to an ISP.

\*\* Support for 64 bit operating systems requires a driver update (available at [www.usr.com/support](http://www.usr.com/support)).

† Call Waiting service required for using Internet Call Notification (ICN). Call Waiting/Caller ID service required for utilizing Caller ID feature of ICN.



[www.usr.com](http://www.usr.com)

IC Approved  
Approuvé par IC



Copyright © 2017 U.S. Robotics Corporation, a Division of UNICOM Global. All rights reserved. U.S. Robotics, and USRobotics are registered trademarks of U.S. Robotics Corporation. Other brand names and product names are for identification purposes only and may be trademarks or registered trademarks of their respective companies.